





Rotation-nozzle TS 98

The rotation-nozzle TS98 for sensitive cleaning takes the aggression out of the blasting-stream and increases the surface-performance at big surfaces upto 50%. With the rotation-nozzle TS98, extra air is added to the blasting-stream. The air rotates the outstreaming air-water.blasting media-mixture. The result is a reduced blasting-pressure at the exit-point and a constant blasting effect over the entire cross-section (Pic. 1).

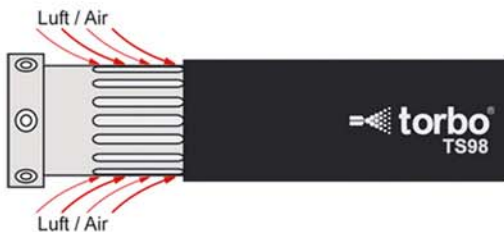

Pic. 2: Blast effect with conventional blast-nozzle.

In the center of the blasting-stream, the aggression is high. In the outside area, the aggression is lower.

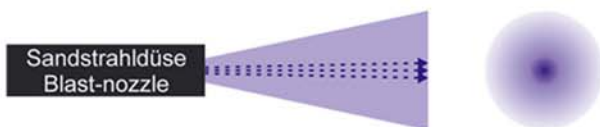

Pic. 3: Blast effect with the rotation-nozzle TS98.

The rotation of the air-water-blasting media-mixture in the TS98 generates a constant sensitive cleaning.

The rotation-nozzle TS98 can be mounted on all conventional blast-nozzles with a cylinderrical outer diameter from 25 to 35 mm.

